


- Ultra thin load bearing surface
- Powder / water mix based system

DimaMat is an ultra thin loadbearing surface suitable for all floor finishes where available construction height is at a minimum. Comprising of two parts, DimaMat consists of a self adhesive mesh and a poured, thin liquid screed.

DimaMat is quick to install and sets rapidly. Floor finishes can be installed after 4 hours.

Fibre reinforcement can be added for additional flexural strength.

Suitable for all substrates i.e. solid concrete, pre-levelled beam and block, suspended timber floors with structural deck.

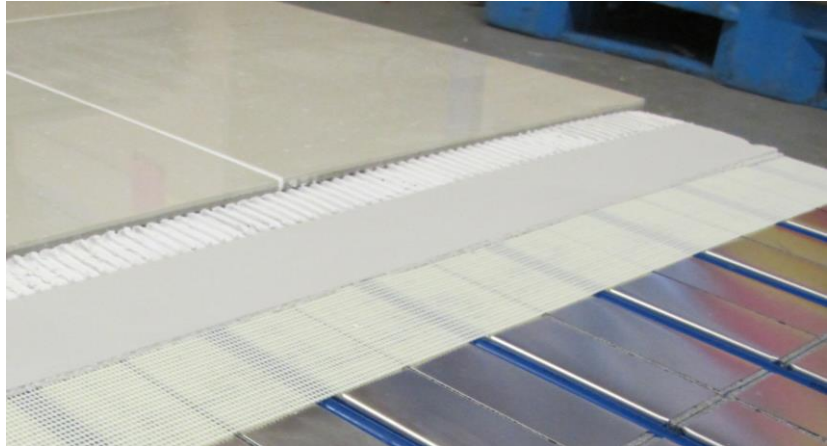

Technical specifications:

DimaMat SPZ mat

Self adhesive mesh

Thickness - 1.2mm
Format – Roll – 1m x 20m

DimaMat Screed Compound

3-10mm screed

Thermal conductivity 1.4 W/m²K
Point load 3.5 kN
Format – 25kg sacks
Requirement – 25kg / m² / 3mm

DimaMat PowerPrimer

Primer to adhere IDEAL panels to substrate

Format – 1 / 10 litre bottles
Application - roller
Requirement – 30-100 gm / m²

